

LineGard® 30 Amp Permanent Series (Splice-in) GFCI

- Power and fault status indicators
- Industrial design for rough service
- Chemical and UV resistant enclosure
- cULus Listed as a Class A GFCI per UL 943 and CSA 22.2 No. 144
- 30 amp configurations in 120 VAC 3-wire, 240 VAC 3-wire, 208 VAC 3-wire, 277 VAC 3-wire or 120/240 VAC 4-wire
- NEMA 4X and 6P wet location rated indoor / outdoor applications
- Available in automatic or manual reset configurations*



Product Description:

The LineGard® 30 Amp Permanent Series is an industrial grade ground fault interrupter device designed and manufactured by North Shore Safety, Ltd., a leader in innovated safety products. The unique design offers the flexibility of splicing in protection of a GFCI anywhere within the length of the circuit run, making it ideal for both new and existing applications. Unlike breaker style GFCI's which have limitations of circuit length from the service panel, the PFGS series can be integrated directly into a circuit or paired in tandem with an approved receptacle and enclosure.

Available with an operating voltage of 120 VAC, 240 VAC, 208 VAC, 277 VAC or 120/240 VAC, all units have 18" splicing leads and a 3/4" NPT fitting to allow connection to 3/4" PVC, EMT, burial and flexible conduits. All units are MADE IN THE USA and are listed per UL 943 and CSA 22.2 No.144

Specifications:

Type:	Class A cULus Listed, UL 943, CSA 22.2 No. 144
Voltage:	120 VAC, 240 VAC, 208 VAC, 277 VAC, 120/240 VAC
Operating voltage range:	85% to 110% of rated VAC
Current:	up to 30 amps or rating of wiring device and/or cable
Frequency:	60 Hz
Trip level:	5mA +/-1mA
Phase:	Single
Response time:	25mS max.
Operating temperature:	-35°C to 66°C
Let-go voltage:	60% of supply voltage
Reset type*:	Automatic or manual
Open neutral protection:	Trips upon loss of neutral
Grounded neutral protection:	Trips if ground and neutral touch at load side
Switch interface:	Double insulated
Latching mechanism:	Electro-magnetic

* Manual configuration should be specified if automatic start-up after power restoration of circuit power creates an unsafe condition.


Related Codes:

- Confined space
OSHA 29 CFR 1926.404 (b)(1)(ii) &
OSHA 29 CFR 1926.405 (a)(2)(ii)(G)
- Construction sites
(NEC 527.6)
- Commercial Garages
(NEC 511.12)
- Outdoor signs
(NEC 600.10)
- Fountains and water displays
(NEC 680.58)
- Spa and hot tubs
(NEC 680.40)
- Marinas and boat yards
(NEC 555.3)

Application Opportunities:

- Electrical wet locations
- Power generators
- Agricultural equipment
- Portable power skilled trade
- Outdoor electrical equipment
- De-icing equipment (roof heaters)
- Portable electric heaters
- Submersible pumps
- Pipeline heaters
- Automotive garages
- Industrial part washers
- Outdoor signage
- Vending equipment
- Production assembly power
- Cement cutting equipment

ORDERING EXAMPLE:

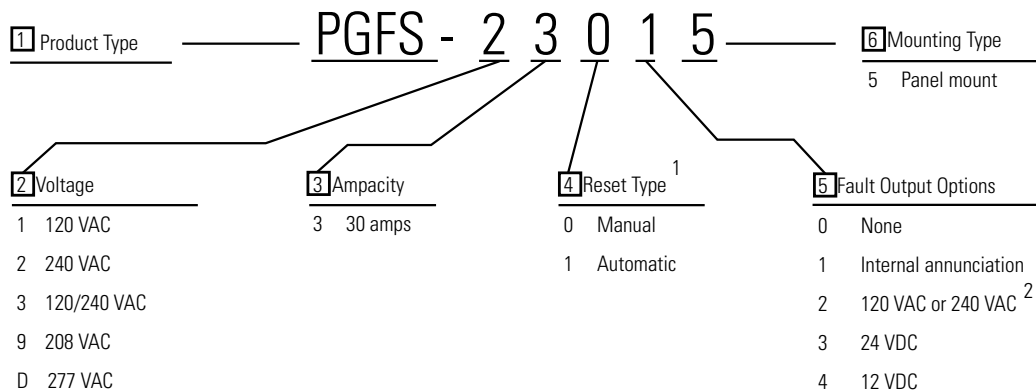

*Note: 1. Manual configuration should be specified if automatic power-up, after power restoration of circuit power, could create an unsafe condition.
2. VAC fault outputs are at line voltage and are not GFCI protected (4-wire 120/240 VAC configuration is a 240 VAC output)
3. 3-mode surge protection is available. Please consult Airpax for other options

Flying Leads (Splice-in)

